

Introducing...  
**Super Speciality**  
Tractor

Narrow in width. Wide on applications.

New  
**28 HP** 20.9 kW  
**Model 3028 EN**



4 Wheel Drive



FNR Lever



Sync Reverser



Narrow Track Width



Powerful Dual PTO

*Zindagi ka  
Best Decision!*<sup>TM</sup>



**JOHN DEERE**

\*Conditions apply.

# TECHNICAL SPECIFICATIONS

## ENGINE

Type : 28 HP (20.9 kW), 2800 RPM, 3 Cylinders, Inline FIP, Coolant cooled with over flow reservoir, Naturally aspirated

Air filter : Dry type, dual element

## TRANSMISSION

Clutch : Single

Gear box : 8 Forward + 8 Reverse, FNR Sync Reverser / Collar Reverser

Speeds : Forward 1.6 - 19.7 kmph  
Reverse 1.6 - 19.7 kmph

## BRAKES

: Oil Immersed Disc Brakes

## HYDRAULICS

Maximum Lifting capacity : 910 kgf

## STEERING

Type : Power

## POWER TAKE OFF

Type : Independent, 6 Splines

Dual PTO : 540 @ 2490 ERPM  
540 @ 1925 ERPM

## WHEELS AND TYRES

Front : 180/85 - D12  
(Optional) 6 x 14 (0.15 x 0.36 m)

Rear : 8.3 x 24 (0.21 x 0.61 m)  
(Optional) 9.5 x 24 (0.24 x 0.61 m)

## FUEL TANK

Capacity : 32 L

## ELECTRICAL SYSTEM

: 55 Ah, 12 V battery, 50 Amp. alternator  
12 V, 1.2 kW Starter motor

## DIMENSIONS AND WEIGHT

Total weight : 1070 kg

Turning radius with brakes : 2300 mm

Turning radius without brakes : 3000 mm

## ACCESSORIES

• Ballast weights • Trailer brake valve

## FACTORY FITTED OPTIONS


- Roll over protection structure (ROPS)
- Draft control lever
- Seat with seat belt
- Hydraulic auxiliary pipe



## FEATURES

- Sync reverser • Finger guard • FNR NSS • PTO NSS
- Underhood with down draft exhaust muffler
- Water separator • Digital hour meter
- Radiator screen • Metal face seal

High Lifting Capacity  
**910 kgf**

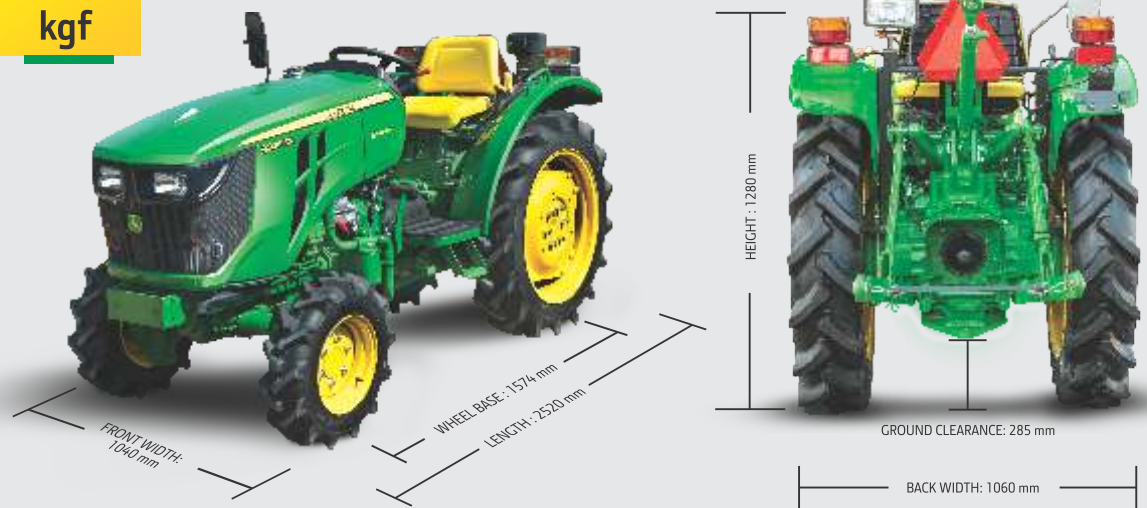

## Specially designed GREENSYSTEM implements for Model 3028 EN



Rotary Tiller



Cultivator



2 Bottom Ridger

### Implement types and working width

- |                             |  |
|-----------------------------|--|
| Rotary Tiller               | - 16 Blades (800 mm), 20 Blades (1000 mm), 24 Blades (1200 mm) |
| Cultivator                  | - 5 tynes, 880 mm  |
| Cultivator (Foldable frame) | - 7 tynes, 1280 mm   |
| Ridger                      | - 2 Bottom, Adjustable   |

## John Deere Genuine Parts

| Economical | Reliable | Easily available |



Note : All the options / features may not be available in a single variant.

**John Deere India Private Limited**  
3rd floor, Tower-15, Cybercity, Magarpatta City, Hadapsar,  
Pune - 411013. Maharashtra. www.JohnDeere.co.in

For more information, please contact our authorised dealer or nearest area office.



- Tractors • Implements
- Harvesters • Finance



Please note: Improvement in the product is a continuous process. Hence the information given in this brochure is subject to change without prior notice. Accessories shown are not the part of standard equipment.